

H3C CR16000-M Series Routers

Product overview

- H3C CR16000-M routers are digital era-oriented cloud service routers applicable to government, finance, transport, power grid, healthcare, education, and carriers. With a carrier-level HA and programmable NP architecture design, the router provides abundant features to process cloud services, carrier-level high availability, and exceptional forwarding capacity.
- With high-density 100GE, 10GE, and GE ports and 155M/622M/2.5G POS, CPOS, and E1/T1 WAN ports, the routers can be deployed at different network positions. The router runs the state-of-the-art Comware network operating system, which is open, containerized, and programmable to meet user requirements in new businesses.
- The router offers the following features:
 - SRv6, which provides customized programming, global control and scheduling, open network construction, simplified Ops deployment, and visible display in cooperating with AD-WAN controllers.
 - iFIT, which provides visible service quality display and fast troubleshooting.
 - FlexE and channelized sub-interfaces, which meet the network slicing requirement at different layers, allowing for strict isolation of different services and SLA for key services.

Views



H3C CR16000-M series routers

Features and highlights

Abundant cloud services

- Supports SRv6, which allows one-hop access to the cloud and simplifies service provisioning.
- Supports iFIT and Telemetry, enabling service status report in real time and granular network monitoring for refined management and effective service assurance.
- Supports AD-WAN carrier and branch network solutions, enabling network intelligent scheduling and refined management and prediction of network trends through service emulation and failure testing.
- Supports network slicing technologies such as FlexE, channelized sub-interfaces, and Flex-Algo. Using network slices at different layers including the physical layer, network layer, and transport layer, the router can separate services of different tenants in the cloud and provides SLA for different services.

Carrier-level high availability

- With the carrier-level hardware framework design, the router supports physical isolation of control, services, and switching, and provides independent switching fabric modules.
- Supports MPU and switching fabric module 1+1 redundancy.
- Supports front-to-rear airflow and supports redundant fan trays that provide 12 fans in total.
- Supports power module N+M redundancy and built-in AC and DC power modules.
- Supports BFD for BGP/IS-IS/RIP/OSPF/static routing and NSR/GR switchover.

Green design

- High-efficient heat dissipation—Adopts the front-to-rear airflow design, increasing heat dissipation efficiency by 40%. The router uses fan tray micro-modularization to make sure that the average module temperature is 5°C (41°F) lower than that in traditional mode. It also supports stable heat dissipation through air deflectors.
- Energy efficiency and consumption reduction—Supports low-power mode configuration through SerDes, cutting-edge DDR controllers, on-demand core startup, and flexible processor frequency configuration. Compared to the preceding generation, the NPs used on the CR16000-M routers have reduced power consumption by 41%.
- Intelligent power module management—Supports powering on modules in turn, which ensures long operation of the router and decreases EMI.
- Automatic fan speed adjustment—Supports fan tray status monitoring and fault alarms based on module temperature and automatic fan speed adjustment based on the ambient temperature and module configuration to reduce power consumption and operating noise.

Technical specifications

Item	CR16000-M1A	CR16000-M8	CR16000-M16
Switching capacity	640Gbps	800Gbps	800Gbps
Chassis	Integrated chassis, which can be installed in a 19-inch rack		

Item	CR16000-M1A	CR16000-M8	CR16000-M16
MPUs	Fixed-port router	2	2
Line cards	Fixed port + 1 Flexible card	8	16
Independent switching fabric modules	Fixed-port router	2	2
Cooling	Front-to-rear airflow	Front-to-rear airflow	Front-to-rear airflow
Independent fan trays	Three independent fan trays in redundancy	Independent fan trays in redundancy	Independent fan trays in redundancy
Power system	Two independent power supplies in redundancy, supporting AC/DC/HVDC	Four built-in AC and DC power modules (N+M redundancy), without occupying any service module slot.	Four built-in AC and DC power modules (N+M redundancy) , without occupying any service module slot.
MTBF	35 years	35 years	35 years
MTTR	0.5 hours	0.5 hours	0.5 hours
Dimensions (H × W × D)	44 × 440 × 435 mm (1.73 × 17.32 × 17.13 in, 1 RU)	267 × 440 × 440 mm (10.51 × 17.32 × 17.32 in, 6 RU)	356 × 440 × 440 mm (14.02 × 17.32 × 17.32 in, 8 RU)
Ports	FE, GE, 10GE (LAN/WAN), 100GE, 155M POS, 622M POS, 2.5G POS, CPOS, ATM, and E1/T1 ports Interface type changing between 100GE and 40GE Interface type changing between 155M POS, 622M POS, and GE Interface type changing between ATM/ and POS		
Unicast routing	IPv4/IPv6 dual stack IPv4/ IPv6 FIB table with up to 4M/2M entries IPv4/ IPv6 Routing table with up to 25M/12M entries Static routing, RIP, RIPng, OSPF, OSPFv3, IS-IS, IS-ISv6, BGP, and BGP4+ DHCP VRRP and VRRPv3 IPv6 neighbor discovery, PMTU discovery, TCP6, ping IPv6, traceroute IPv6, socket IPv6, static IPv6 DNS, specified IPv6 DNS server, and TFTP IPv6 client IPv4 to IPv6 transition ICMPv6 MIB, UDP6 MIB, TCP6 MIB, and IPv6 MIB ECMP and UCMP Policy-based routing Routing policy Tunnels such as GRE Static routing FRR, OSPF FRR, ISIS FRR, and BGP FRR		

Item	CR16000-M1A	CR16000-M8	CR16000-M16
Multicast	Routing protocols, including PIM-DM, PIM-SM, PIM-SSM, MSDP, MBGP, and Anycast-RP IGMPv1/v2/v3 and IGMP snooping v1/v2/v3 PIM6-DM, PIM6-SM, and PIM6-SSM MLDv1/v2 and MLD snooping v1 Multicast policy and multicast QoS		
MPLS VPN	MPLS label distribution protocols such as LDP and RSVP-TE P/PE compliant with RFC 2547bis Three inter-AS MPLS VPN methods (option1/option2/option3) HoPE Multi-role host L2VPN, L3VPN, inter-AS L2VPN and L3VPN MPLS TE FRR and LDP FRR, with a switchover time of not more than 50ms 6PE and 6vPE Distributed multicast VPN ACL, which identifies traffic and forwards the traffic to different VPNs MPLS VPN network troubleshooting features, including MPLS ping and MPLS traceroute L2VPN access to L3VPN Access to VPLS via QinQ		
BRAS service	PPPoE, PPPoEoVLAN, and PPPoEoQ access authentication Layer 2 portal, Layer 3 portal, and QinQ portal access authentication IPoE, IPoEoVLAN, and IPoEoQ access authentication Leased access authentication such as subnet-leased, interface-leased, and L2VPN-leased access authentication L2TP Layer 2 transparent access and Layer 3 transparent access RADIUS, TACACS, and COPS protocols iTA, which differentiates services by destination addresses to perform accounting, bandwidth control, and QoS Unified wired and wireless authentication solutions, which meet the demands for massive user access and wireless client mobility		
ACL	IPv4 and IPv6 ACL and EACL Ingress/Egress ACL Hardware-based ACL		

Item	CR16000-M1A	CR16000-M8	CR16000-M16
QoS	HQoS Queue scheduling mechanisms such as PQ, WFQ, and CBWFQ More granular and flexible traffic control through HQoS Traffic shaping Congestion avoidance technologies such as tail drop and WRED drop Priority marking and remarking 802.1p, TOS, DSCP, and EXP priority mappings Congestion avoidance, traffic policing, and traffic shaping Data packet marking based on IP addresses, port numbers, 802.1P, and DSCP values Data packet multilevel queue mechanisms include CQ, PQ, LLQ, and WFQ Multicast QoS		
Ethernet features	802.1Q, VLAN QinQ termination Layer2 Protocol Tunneling 802.3d (STP)/802.3w (RSTP)/802.3s (MSTP) IEEE 802.3ad (link aggregation), static link aggregation, and link aggregation across different modules Aggregation of ports with different transmission rates Port mirroring and flow mirroring FlexE Channelized sub-interfaces		
SDN technologies	VXLAN and EVPN PCEP Network information collection protocols such as BGP-LS NETCONF and YANG MPLS SR and SRv6 CBTS OpenFlow BGP FlowSpec Telemetry 5G bearer network technologies such as EVPN, SRv6, and 1588v2		
Traffic analysis	NetStream, which supports the version 7, and version 9 data export formats, sampling, and flow statistics Multi-log host Hardware-based NTA IPv4/IPv6/MPLS traffic collection and analysis Traffic collection and analysis in the inbound and outbound directions of interfaces Abnormal traffic detection and monitoring		

Item	CR16000-M1A	CR16000-M8	CR16000-M16
High availability	MPU, switching fabric module, power module, and fan tray redundancy Separation of the control plane and switching plane Independent switching fabric modules Automatic fan speed adjustment Hot swapping for all components, and hot swapping of switching fabric modules without removing fan modules Built-in DC and AC power modules, which can be installed on the same router and do not occupy service slots NSF, NSR, and GR BFD, which supports fast failure detection and a switchover time of not more than 50ms iFIT, which can detect network failures in real time, troubleshoot the network failures, and implement visible management over performance data		
System management	In-band and out-of-band network management Console/AUX Modem/Telnet/SSH2.0 CLI-based configuration FTP, TFTP, XMODEM, and SFTP file uploading and downloading management SNMP v1/v2/v3 RMON v1/v2 (groups 1, 2, 3, and 9) NTP NQA Fault alarms and self-healing Data logs ICMP Syslog Traceroute Multithreading access to the device via Telnet 1588v2		
Temperature	Operating temperature: 0°C to 45°C (32°F to 113°F) Storage temperature: -40°C to +70°C (-40°F to +158°F)		
Operating temperature change	≤ 30°C (86°F) per hour		
Relative humidity	Operating humidity: 10% to 95% RH, non-condensing Storage humidity: 5% to 95% RH, non-condensing		
Altitude	≤ 5000 m (16404.20 ft)		

- The options may be different depending on the specific requirement. Restrictions and limitations may apply. To confirm availability, refer to related user guide or visit H3C website <https://www.h3c.com/en/home/htb/>.

Regulatory Compliance

Item	Description
EMC	CISPR 32
	EN 55032
	AS/NZS CISPR32
	CISPR 35:2016
	EN 55035
	ETSI EN 300 386
	EN 61000-3-2
	EN IEC 61000-3-2
	EN 61000-3-3
	FCC Part 15 Subpart B
	ICES-003 Issue 7
	ANSI C63.4
	VCCI-CISPR 32
	IEC 61000-3-2
	IEC 61000-3-3
	IEC 61000-4-2
	IEC 61000-4-3
	IEC 61000-4-4
	IEC 61000-4-5
	IEC 61000-4-6
	IEC 61000-4-8
	IEC 61000-4-11
	EN 61000-4-2
	EN IEC 61000-4-3
	EN 61000-4-4
	EN 61000-4-5
	EN IEC 61000-4-6
	EN 61000-4-8
	EN 61000-4-11


Item	Description
Environment	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-30 IEC 60068-2-14 IEC 60068-2-78 ETSI EN 300019-1-3 ETSI EN 300 019-2-1 ETSI EN 300019-2-3
Safety	UL 62368-1 CAN/CSA C22.2 No 62368-1 IEC 62368-1 EN 62368-1 AS/NZS 62368-1
Environment Protection	2016/65/EU & 2015/863 (EU RoHS) Regulation (EC) No.1997/2006 (REACH) 2012/19/EU (WEEE) (EU) 2023/1542

Application scenarios

Backbone/vertical network


The CR16000-M routers can be deployed at the backbone/vertical network, which has high requirements for availability. You deploy two CR16000-M routers at the province and city levels for redundancy and deploy two CR16000-M routers at the county level with dual-homed connections to the uplink.

This networking scheme is applicable to the setup, expansion, and brownfield deployment of the backbone/vertical network in the government, finance, transport, power grid, healthcare, and education industries. This solution can be used in conjunction with the AD-WAN carrier solution.

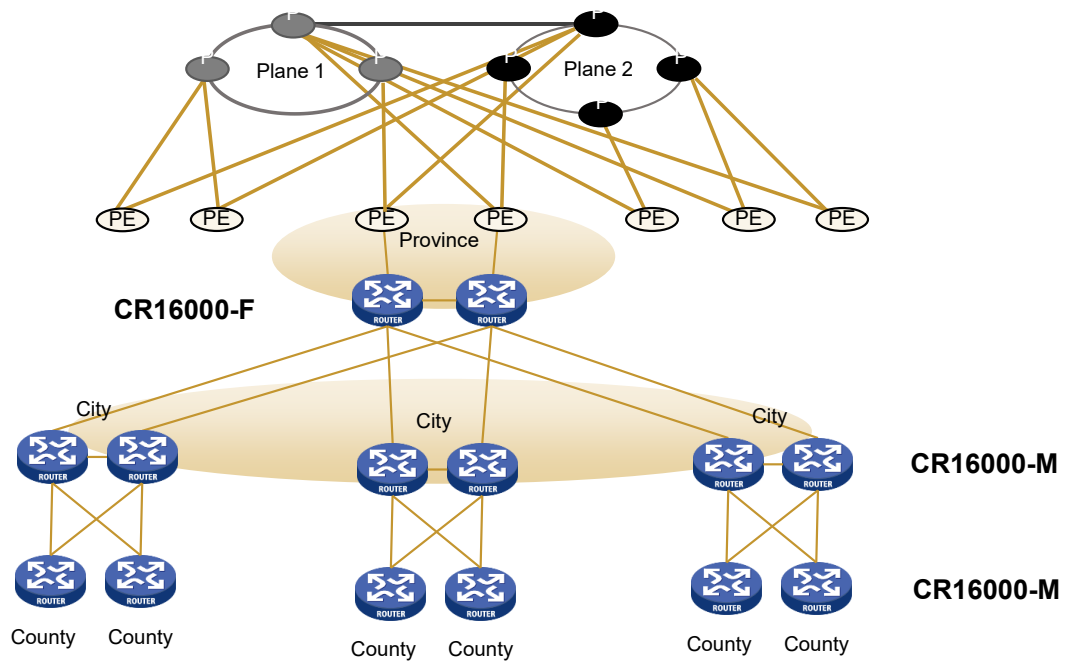

Data center egress

You can deploy CR16000-M routers as egress routers of data centers for large enterprises. The CR16000-M router supports one hop to cloud (data center) as long as they are reachable to the data center with IPv6, ignoring the backbone network link status. In addition, you can deploy SDN for automated service deployment, visible service flow, and intelligent traffic optimization, enhancing user experience.

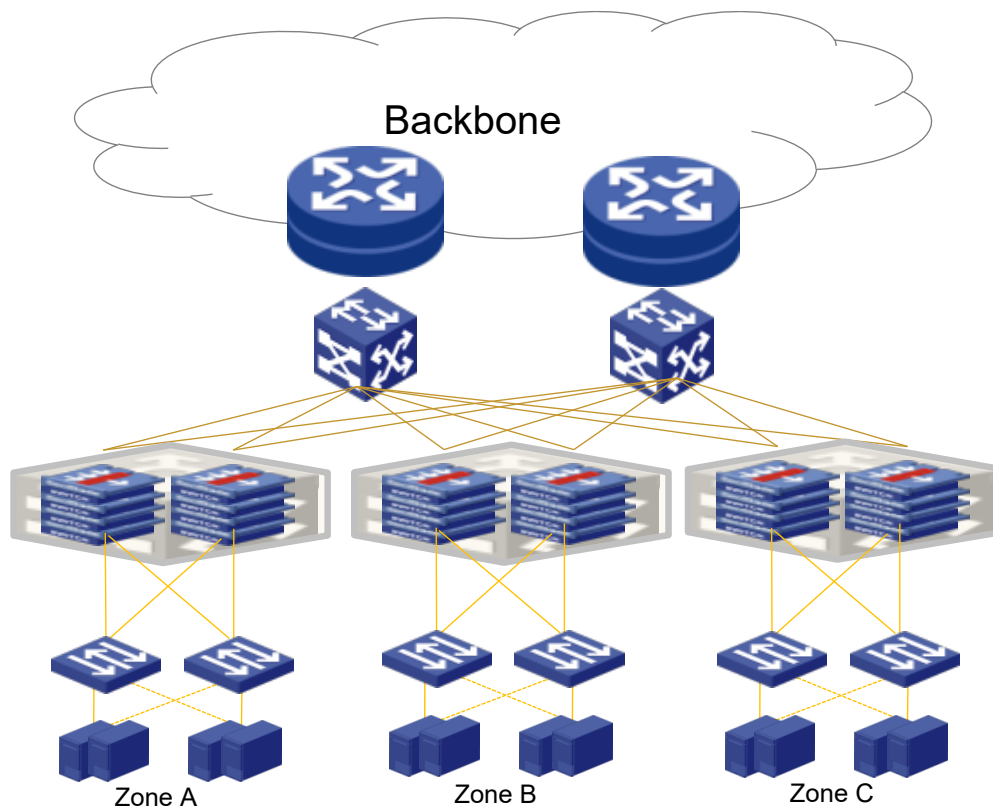

Ordering information

Item		Description
Chassis	CR16000-M8	H3C CR16000-M8 router chassis
	CR16000-M16	H3C CR16000-M16 router chassis
	CR16000-M1A	H3C CR16000-M1A high-end router
Power module	PSR2400-12D	DC 2400W power module
	PSR2500-12A	AC 2500W power module
	PSR450-12D	450W DC Power Supply Module
	PSR450-12A1	450W AC Power Supply Module
	PSR450-12AHD	450W HVDC Power Supply Module
MPU module	SR07MPUA3-M	H3C CR16000-M Main Processing Unit (A3)
Switching fabric module	SFE-A1	H3C CR16000-M Network Service Processing Unit (A1)
Interface module	MIC-CQ2L-M	H3C CR16000-M 2-Port 100G Ethernet Optical Interface Card (QSFP28,LC) (MIC-M)
	MIC-CQ1LF-M	H3C CR16000-M 1-Port 100G Flexible Ethernet Optical Interface Card (QSFP28,LC) (MIC-M)
	MIC-CQ1L-M	H3C CR16000-M 1-Port 100G Ethernet Optical Interface Card (QSFP28,LC) (MIC-M)
	MIC-XP10L-M	H3C CR16000-M 10-Port 10GBASE-R/W Ethernet Optical Interface Card (SFP+,LC) (MIC-M)

Item		Description
	MIC-XP4L-M	H3C CR16000-M 4-Port 10GBASE-R/W Ethernet Optical Interface Card (SFP+,LC) (MIC-M)
	MIC-GP24L-M	H3C CR16000-M 24-Port 1000BASE-X Ethernet Optical Interface Card (SFP,LC) (MIC-M)
	MIC-GP12L-M	H3C CR16000-M 12-Port 1000BASE-X Ethernet Optical Interface Card (SFP,LC) (MIC-M)
	MIC-GT12L-M	H3C CR16000-M 12-Port 1000BASE-X Ethernet Copper Interface Card (RJ45) (MIC-M)
	MIC-PSP4L-M	H3C CR16000-M 4-Port OC-48c/STM-16c (2.5G) POS Optical Interface Card (SFP,LC) (MIC-M)
	MIC-SP4L-M	H3C CR16000-M 4-Port OC-3c/STM-1c (155M) POS/ATM or 1-Port OC-12c/STM-4c (622M) POS/ATM Optical Interface Card (SFP,LC) (MIC-M)
	MIC-TCP8L-M	H3C CR16000-M 8-Port OC-3c/OC-12c (622M/155M) POS/GE Optical Interface Card (SFP,LC) (MIC-M)
	MIC-CLP4L-M	H3C CR16000-M 4-Port OC-3/STM-1 (155M) Channelized POS Optical Interface Card (SFP,LC) (MIC-M)
	MIC-ET16L-M	H3C CR16000-M 16-Port E1 Copper Interface Card (HM96 Male Connector) (MIC-M)
	GIC-CQ1LF	2-Port 50G/1-Port 100G Flexible Ethernet Optical Interface Card (QSFP28,LC)(GIC)
	GIC-XP12LF	12-Port 10GBASE-R Flexible Ethernet Optical Interface Card (SFP+,LC)(GIC)



New H3C Technologies Co., Limited
Beijing Headquarters
Tower 1, LSH Center, 8 Guangshun South Street,
Chaoyang
District, Beijing, China
Zip: 100102
Hangzhou Headquarters
No.466 Changhe Road, Binjiang District, Hangzhou,
Zhejiang,
China Zip: 310052
Tel: +86-571-86760000
Fax: +86-571-86760001

Copyright ©2025 New H3C Technologies Co., Limited
Reserves all rights Disclaimer: Though H3C strives to
provide accurate information in this document, we
cannot guarantee that details do not contain any
technical error or printing error. Therefore, H3C cannot
accept responsibility for any inaccuracy in this
document. H3C reserves the right for the modification
of the contents herein without prior notification.

<https://www.h3c.com>